



PANEL MOUNT BALL VALVES

CONSTRUCTION

• CA360 Brass



APPLICATIONS

• Air Brake Systems



RANGES

• Temperature Range:

-40°F to 300°F

-40°C to +93°C

• Pressure Range:

1500psig



FEATURES/BENEFITS

- Bar-Stock Brass Body
- Double O-Ring Stem Seal
- 20,000 Leak Free Cycles
- Blow Out Proof Stem
- Metal Retainer Seal
- Guaranteed Quality

NOTES

- Parts that include “PBF” are supplied as low lead compliant.
- Part numbers without the “PBF” distinction are NOT lead free compliant.
- Non-stock items and special parts are available on a quotation basis.
- Configurations and dimensions are subject to change without notice.




⚠ WARNING: Products offered by Robo-Fit can expose you to chemicals such as lead, a chemical which is known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information go to www.P65Warnings.ca.gov



3222BV SERIES 3-WAY BALL VALVES, FPT x FPT x FPT

PART NUMBER	PORT A	PORT B	PORT C	CV	ORIFICE DIA.
3222BV-LLXL	1/4" FPT	1/4" FPT	1/4" FPT	1.57	0.250

**Valves to Read: Left, Right, Middle*

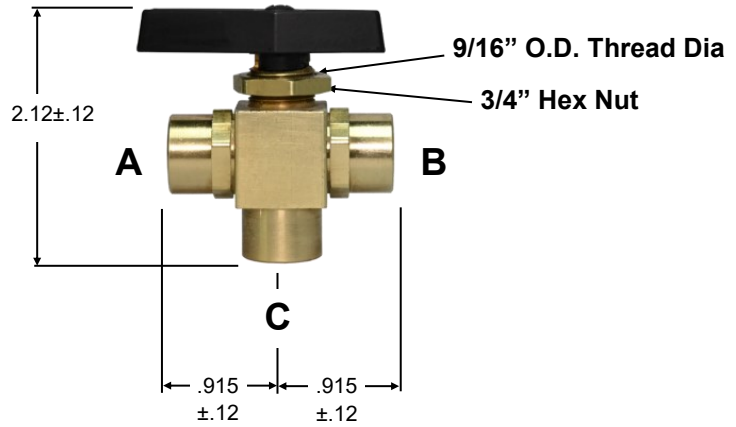

PART NUMBER	PORT A	PORT B	PORT C	CV	ORIFICE DIA.
3222BV-LLXL-8	1/4" FPT	1/4" FPT	1/4" FPT	1.57	0.250

