



35000/9000 STACKED VALVES


CONSTRUCTION	• CA360 Brass	
APPLICATIONS	<ul style="list-style-type: none"> • Panel Applications • Actuator Switching Control • Fuel Supply & Return • U.L. Approved for Refrigerant Service 	
RANGES	<ul style="list-style-type: none"> • Maximum Pressure : 1500 PSIG • Temperature: -40° F to +300° F (Standard) -40° F to +400° F (Special) 	 

FEATURES/BENEFITS
• Bar-Stock Brass Body
• Double O-Ring Stem Seal
• 20,000 Leak Free Cycles
• Blow Out Proof Stem
• Custom Ball Porting
• Metal Retainer Seal
• Made in USA 
• Guaranteed Quality


BALL DRILLING

(View From Top of Ball)

Upper Stack
Porting Options

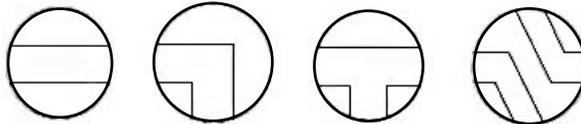

Lower Stack
Porting Options

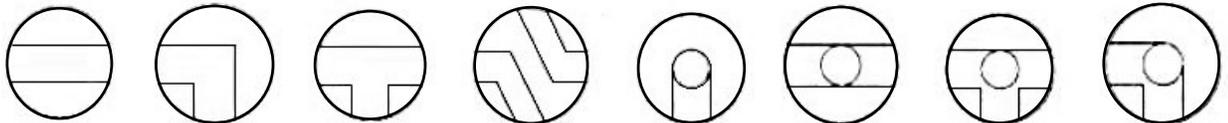

**We encourage specials! If you don't see a configuration available in our catalog don't be discouraged, please contact our sales team directly so we can make sure you're getting the best valve for your application. Email sales@robo-fit.com with details.*



MADE IN USA

35000/9000 SERIES MULTI-PORT DUAL CONTROL STACKED VALVES

PART NUMBER	END CONNECTION	CV	ORIFICE
35222B4-ZZ-JJXJ	1/8" FPT (4-WAY)	1.57	.25
35222B4-ZZ-LLXL	1/4" FPT (4-WAY)	1.57	.25
35222B5-ZD-JJXJ	1/8" FPT (5-WAY)	1.57	.25
35222B5-ZD-LLXL	1/4" FPT (5-WAY)	1.57	.25
9222B8-TT-JJXJ	1/8" FPT (8-WAY)	.64	.16
9222B8-TT-LLXL	1/4" FPT (8-WAY)	.64	.16
9222B8-TT-NNXN	3/8" FPT (8-WAY)	3.53	.375
9222B8-TT-PPXP	1/2" FPT (8-WAY)	3.53	.375
9222B9-TA-JJXJ	1/8" FPT (9-WAY)	.64	.16
9222B9-TA-LLXL	1/4" FPT (9-WAY)	.64	.16
9222B9-TA-NNXN	3/8" FPT (9-WAY)	3.53	.375
9222B9-TA-PPXP	1/2" FPT (9-WAY)	3.53	.375



35000 SERIES



9000 SERIES




Alternative Handle Options Available Upon Request.

Upper Stack

(2 Port on 35000)

(3 & 4 Port on 9000)

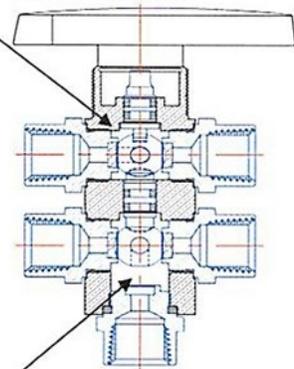

Lower Stack

(2 & 3 Port on 35000)

(4 & 5 Port on 9000)



MADE IN USA